



# EQUIPMENT CATALOG





**Manufacturing tough, innovative equipment that moves you forward.**

## **QUALITY**

When it comes to quality, we never compromise. From production to service, we deliver equipment that's built to last. *That's what Ledwell Made means.*

## **GRIT**

We work hard. We're problem solvers. We meet customer challenges with innovative solutions. *We get it done.*

## **LEGACY**

It took sweat, dedication, and a lot of hard work to build this company. *This legacy guides us today.*

## **FAMILY**

Our people care. We do what's right for our employees, our customers, and our community – *because that's what family does.*

---

### **LEDWELL & SON ENTERPRISES, INC.**

3300 Waco St.  
Texarkana, Texas 75501  
888-LEDWELL  
ledwell.com  
Se habla Español

### **SALES TEAM**

888.533.9355  
sales@ledwell.com

### **SERVICE & WARRANTY**

888.533.9355  
service@ledwell.com

### **PARTS TEAM**

888.533.9355  
sales@ledwell.com



We back every product we build with the  
**LEDWELL MADE** GUARANTEE



**PRIMED & READY**

You get what you need fast. With a vast stock of materials, we build what you need with the industry's shortest lead times.

**SWIFT SUPPORT**

You get back to work quickly. We respond to questions and service needs with unrivaled urgency.

**EXPRESS SHIPPING**

You don't have to wait for parts. We manufacture more than 85% of our parts in-house and ship 99% within 24 hours of your request.

**TOUGH BUILD**

Your Ledwell products will last for decades with proper maintenance. We only fabricate products that stand the test of time in the field.

**VISIONARY ENGINEERING**

You get cutting-edge machinery that works for you. From basic trailers to advanced custom fabrications, we approach every project with innovative craftsmanship.

**SOLID PARTNERSHIPS**

Our strong industry partnerships work in your favor. When you need a hand, we mobilize our network to help you get priority service around the world.

# CONTENTS

LUBE BUDDY MAX.....	6
LUBE BUDDY JR.....	7
LOADING RAMP.....	8
PERIMETER BEAM HYDRATAIL TRAILER WITH MINI DECK.....	9
PERIMETER BEAM HYDRATAIL TRAILER WITH MINI DECK LOW PROFILE.....	10
PERIMETER BEAM HYDRATAIL TRAILER WITH MINI DECK CANADA.....	11
PERIMETER BEAM HYDRATAIL TRAILER WITH MINI DECK WESTERN CANADA.....	12
PERIMETER BEAM HYDRATAIL TRAILER DOUBLE DROP WITH MINI DECK.....	13
HYDRATILT HYDRATAIL TRAILER.....	14
DETACHABLE GOOSENECK TRAILER.....	15
FLATBED TRAILER.....	16
DROP DECK TRAILER.....	17
SELF CONTAINED UNIT.....	18
HYDRATILT TRUCK.....	19
ATTENUATOR TRUCK.....	20
FLATBED DUMP.....	21
3-4 DUMP.....	22
5-6 TUB DUMP.....	23
5-6 BOX DUMP.....	24
10-14 TUB DUMP.....	25
10-14 BOX DUMP.....	26
2000 GALLON WATER.....	27
4000 GALLON WATER.....	28
20'/22' STAKEBED WITH LIFT GATE.....	29
12' STAKEBED WITH LIFT GATE.....	30
PORTABLE RESTROOM SERVICE.....	31





### **CHASSIS IN STOCK**

*Need a truck fast? With a lot full of chassis of all kinds, we're ready to build the truck you need with the industry's fastest lead times.*

### **PARTS READY TO SHIP**

You don't have to wait for parts. We manufacture more than 85% of our parts in-house and ship 99% within 24 hours of your request.

888.533.9355 | [parts@ledwell.com](mailto:parts@ledwell.com)



# LUBE "BUDDY" MAX

## SPECIFICATIONS

Steel Tool Box 60"L X 42"T X 24"D - 14ga

Houses Battery Box, Heavy Duty Weather Proof Drawer Package, and Misc. Shelf Package

Tool Box Door material 1/8" Aluminum Tread Plate

Steel Tool Box 52"L X 40"T X 34"D - 14ga

Houses All Hose Reels for Product pumps and Waste Oil Pumps

Tool Box Door material 1/8" Aluminum Tread Plate

Steel - tool box 32"L X 40" X 24" D - 14ga

Houses new filters on shelves and used filters below with drip pan and suction port for removal of waste

Standard Product Tanks: 100G Fresh, 50G Fresh, and 150G Waste

13HP Heavy Duty Compressor Unit

Supplies product delivery

Battery charge for on board 12V battery

One - Diaphragm pump for waste

Two - Product pumps for fresh oil

Two - Electronic Graco Flow Meters for fresh oil

Grease Pump

30G New/Clean Grease barrel

Grease gun with swivel and 30" whip hose

Two - Hanay Hose reel - product with hose

One - Hanay Hose reel - waste (diaphragm) with hose

One - Hanay Hose reel - grease with hose



One - Hanay Hose reel - Air with hose

Mechanics drawer set - Heavy Duty Water Proof

Battery and battery box

Non-vented brass caps on fresh tanks X 2

Breather - 3/4" npt chrome X 3 on all tanks

Air manifold to operate all product reels

## OPTIONS


Call your Ledwell Sales Team for Lube "Buddy" options.

## QUOTE #

L25203: Lube Buddy Max



## LUBE "BUDDY" JR

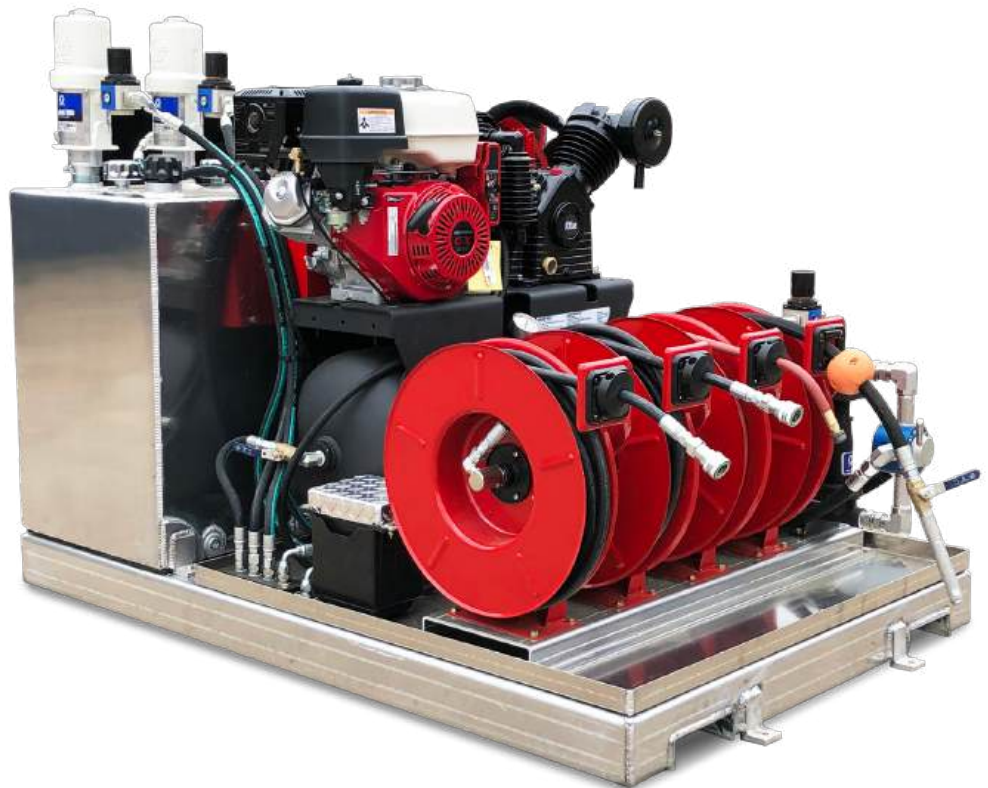

### SPECIFICATIONS

- All aluminum construction
- Two - 20 gallon fresh tank
- One - 40 gallon waste tank with a 17" x 9" opening with lid for filter disposal
- Two - product pumps for fresh fluids
- One - diaphragm pump for waste with 4-way valve to fill or empty tank
- Two - fresh fluid hose reel - 50 ft
- One - air hose reel - 50 ft
- One - waste oil reel - 20 ft
- Two - metering nozzle with quick couplers
- Mounted on skid with fork channels 47" wide x 70" long

### COMPRESSOR OPTION

- Gasoline powered / Electric start air compressor - 24.5 CFM with 30 gallon reservoir
- One - battery and battery box

### OPTIONS

Call your Ledwell Sales Team for Lube "Buddy" options.

### QUOTE #

- L25200: Lube Buddy Jr
- L25201: Lube Buddy Jr with Compressor
- L25202: Lube Buddy Jr 12V Electric



## LOADING RAMP



### SPECIFICATIONS

120" width

50,000 lb capacity - rated 50,000 lb in 10'

Two - 24" adjustable approach ramps

Three - 12" x 19# beam main members

6" Jr. I-beam crossmembers on 12" centers

One - set of 62,500 lb landing gear

One - set of 20,000 lb landing gear

Floor - treated pine 1/2" above steel rails (for track equipment loading)

2'6" chain ties - to attach ramp to trailer

Adjusts from 35" to 52" loading height

Painted one color

### ALL-WEATHER OPTION

Floor - heavy gauge expanded metal over 2" x 2" x 3/16" steel tubing on 8" centers

### OPTIONS

144" wide

Fixed axle

Guide rails

Hand rails

Two additional flaps

Electric front landing gear with Solar Panel

### QUOTE #

L25301: 25' Ramp

L25302: 25' All-Weather Ramp

L25303: 30' Ramp

L25304: 30' All-Weather Ramp





# PERIMETER BEAM HYDRATAIL TRAILER WITH MINI DECK LOW PROFILE



## SPECIFICATIONS

80,000 lb GVWR

102" width

10' front deck; 30' main deck - main deck to have 10' built-in ramp to lift & lock into front deck for approach from main deck

Mini-deck extensions to make deck full width

8' hydraulic tail with 5' fold under, unfolds to 13' approach

Amber loading lights in tail

Heavy Duty expanded metal on tail, fold, & over wheel area

1/4" steel plate over tires

Apitong wood deck

External Stake pockets on 48" centers with internal keyhole slots alternating to have tie down points on 24" centers

Stake pockets 12" in from outside edge on front of trailer

Chain slot tie downs in center of trailer

bed full length, large center holes for chain hook

Chain stops full length upper & lower deck with cutout on mini-deck (excluding tail)

Two - toolboxes

Side steps for trailer deck access

Air ride suspension

Air-weigh scale system

235/75R 17.5 low profile radial tires on steel wheels

Cats eye tire pressure monitoring system

Two - 22,500 lb axles

4S2M WABCO ABS anti-skid brake system

Dual front mounted manual hydraulic controls

Wireless remote controls

20,000 lb hydraulic winch with 75' x 5/8" cable & tail chain

Heavy duty two speed landing gear

Truck-lite LED sealed wiring system, 3-M conspicuity tape

Trailer safety lights

Work lights in drop deck

Swing out loading lights on rear

4-way light socket at rear of trailer

Non-slip protective surface coating, including upper deck

Painted United Rental Blue with flanges painted non-skid yellow

Mud flaps, measuring stick holder

## OPTIONS

Arctic Package

Grease System

## QUOTE #

L25401LP. 48' length - 2 axle



## PERIMETER BEAM HYDRATAIL TRAILER WITH MINI DECK CANADA



### SPECIFICATIONS

80,000 lb GVWR

102" width

10' front deck; 35' main deck - main deck to have 10' built-in ramp to lift & lock into front deck for approach from main deck

Manual bed lock

7'6" hydraulic tail with 4'6" fold under, unfolds to 12' approach

Mini-deck extensions to make deck full width

Amber loading lights in tail

Extended aluminum cover full width over remote area and hinge for easy service access

Wiring on top of bottom beam flange: weatherproof plugs and install in conduit

Heavy Duty expanded metal on tail, fold, & over wheel area

1/4" steel plate over tires

Apitong wood deck

External Stake pockets on 48" centers

with internal keyhole slots alternating to have tie down points on 24" centers

Stake pockets 12" in from outside edge on front of trailer

Chain stops full length upper & lower deck with cutout on mini-deck

Keyhole slot tie downs in center of trailer bed full length

Two - toolboxes with lids

Side steps for trailer deck access

Alternating formed 6" & 9" jr. "I" beam cross members on 12" centers

Air ride suspension

Air-weigh scale system

22.5 low profile radial tires on steel wheels (99" track)

Cats eye tire pressure monitoring system

Three - 25,000 lb axles, no lift axle

4S2M WABCO ABS anti-skid brake system

Dual front mounted manual hydraulic controls

Wireless remote controls

20,000 lb hydraulic winch with 75' x 5/8" cable & tail chain

Heavy duty two speed landing gear

Truck-lite LED sealed wiring system in conduit, 3-M conspicuity tape

Trailer safety lights

Work lights in drop deck

Swing out loading lights on rear

4-way light socket at rear of trailer

Oversize load package

Non-slip protective surface coating, including upper deck

Painted United Rental Blue with flanges painted non-skid yellow

Mud flaps, measuring stick holder

### QUOTE #

L25401CN: 48' length - 2 axle

L25402CN: 53' length - 3 axle



# PERIMETER BEAM HYDRATAIL TRAILER WITH MINI DECK WESTERN CANADA



## SPECIFICATIONS

80,000 lb GVWR

108" width

10' front deck; 35' main deck - main deck to have 10' built-in ramp to lift & lock into front deck for approach from main deck

7' 6" hydraulic tail with 4' 6" fold under, unfolds to 12' approach

Mini-deck extensions to make deck full width

Amber loading lights in tail

Trailer safety lights

Oversize load package

Extended aluminum cover full width over remote area and hinge for easy service access

Manual bed locks

Wiring on top of bottom beam flange: weatherproof plugs and install in conduit

Heavy Duty expanded metal on tail, fold, & over wheel area

1/4" steel plate over tires

Apitong wood deck

External Stake pockets on 48" centers with internal keyhole slots alternating to have tie down points on 24" centers

Stake pockets 12" in from outside edge on front of trailer

Chain stops full length upper & lower deck with cutout on mini-deck

Keyhole slot tie downs in center of trailer bed full length

Two - toolboxes with lids

Side steps for trailer deck access

Alternating formed 6" & 9" jr. "I" beam cross members on 12" centers

Air ride suspension

Air-weigh scale system

22.5 low profile radial tires on steel wheels

Cat's eye tire pressure monitoring system

Three - 30,000 lb axles, no lift axle

4S2M WABCO ABS anti-skid brake system

Dual front mounted manual hydraulic controls

Wireless remote controls

20,000 lb hydraulic winch with 75' x 5/8" cable & tail chain

Heavy duty two speed landing gear

Truck-lite LED sealed wiring system, 3-M conspicuity tape

Trailer safety lights, Work lights in drop deck, Swing out loading lights on rear

4-way light socket at rear of trailer

Oversize load package

Non-slip protective surface coating, including upper deck

Painted United Rental Blue with flanges painted non-skid yellow

Mud flaps, measuring stick holder

## QUOTE #

L25402WC: 53' length - 3 axle


L25402WCx102: 53' length - 3 axle | 102" width

L25402BC50Tx108: 53' length - 3 axle | 108" width | 100,000 lb GVWR

L25402BC50T: 53' length - 3 axle | 102" width | 100,000 lb GVWR



## PERIMETER BEAM HYDRATAIL TRAILER DOUBLE DROP WITH MINI DECK

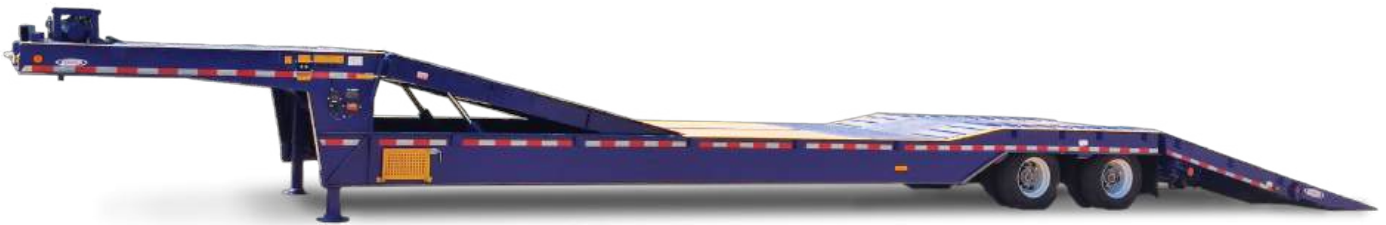

### SPECIFICATIONS

80,000 lb GVWR

102" width

10' front deck; 30' main deck - main deck to have 10' built-in ramp to lift & lock into front deck for approach from main deck

Mini-deck extensions to make deck full width

6" double drop in main deck – extended slope

8' hydraulic tail with 5' fold under, unfolds to 13' approach

Amber loading lights in tail

Short grouser bars on outside edge

1/4" steel plate over tires

Apitong wood deck

External Stake pockets on 48" centers w/ internal keyhole slots alternating to have tie down points on 24" centers

Stake pockets 12" in from outside edge on front of trailer

Chain stops full length upper & lower deck with cutout on mini-deck

Keyhole slot tie downs in center of trailer bed full length

Two - toolboxes

Side steps for trailer deck access

Air ride suspension

Air-weigh scale system

235/75R 17.5 low profile radial tires on steel wheels

Cats eye tire pressure monitoring system

Two - 25,000 lb axles

4S2M WABCO ABS anti-skid brake system

Dual front mounted manual hydraulic controls

Wireless remote controls

20,000 lb hydraulic winch with 75' x 5/8" cable & tail chain

Heavy duty two speed landing gear

Truck-lite LED sealed wiring system, 3-M conspicuity tape

Trailer safety lights

Work lights in drop deck

Swing out loading lights on rear

4-way light socket at rear of trailer

Non-slip protective surface coating, including upper deck

Painted United Rental Blue with flanges painted non-skid yellow

Mud flaps, measuring stick holder

### OPTIONS

Arctic Package

Grease System

### QUOTE #

L25401DD: 48' length - 2 axle

L25402DD: 53' length - 3 axle



# HYDRATILT HYDRATAIL TRAILER



## SPECIFICATIONS

80,000 lb GVWR

102" width

Main deck tilts up hydraulically to front deck level, air locked in the up position

8' hydraulic tail with 4' fold under, unfolds to 12' approach

Amber loading lights in tail

Expanded metal on tail, fold, & over wheel area

1/4" steel plate over tires

Apitong wood deck

External Stake pockets on 48" centers with internal keyhole slots alternating to have tie down points on 24" centers

Stake pockets 12" in from outside edge on front of trailer

Chain stops full length upper & lower deck with cutout on mini-deck (excluding tail)

Keyhole slot tie downs in center of trailer bed full length

Two - toolboxes

Side steps for trailer deck access

Air ride suspension

Air-weigh scale system

235/75R 17.5 low profile radial tires on steel wheels

Cats eye tire pressure monitoring system

Three - 25,000 lb axles, no lift axle

4S2M WABCO ABS anti-skid brake system

Dual front mounted manual hydraulic controls

Wireless remote controls

20,000 lb hydraulic winch with 75' x 5/8" cable & tail chain

Heavy duty two speed landing gear

Truck-lite LED sealed wiring system with mid ship blinker, 3-M conspicuity tape

Trailer safety lights

Work lights in drop deck

Swing out loading lights on rear

4-way light socket at rear of trailer

Non-slip protective surface coating, including upper deck

Painted United Rental Blue with top of trailer and flanges painted non-skid yellow

Mud flaps, measuring stick holder

## OPTIONS

Arctic Package

Grease System

## QUOTE #

L25403: 48' length - 2 axle

L25404: 53' length - 3 axle

L25404-22.5: 53' length - 3 axle | 22.5" tires

L25404-CN: 53' length - 3 axle



## DOUBLE DROP DETACHABLE GOOSENECK TRAILER



### SPECIFICATIONS

100,000 lb GVWR

102" width

All steel construction

16" high strength steel fabricated beams

Crossmembers on 12" centers

Swingout side extensions

Gooseneck - hydraulically stabilized

Four - 5" pivot cylinders

One - 3" stabilizer cylinder, adjustable ride height

Chain slots in outer upper flange

Chain stops full length

Fold down ramps on front of main deck

Center of deck to have loose planking

Three - 25,000 lb axles on 60" centers

Rear axle auto air lift

Bolster style in wheel area

Boom trough over axles

255/75R 22.5 Steel wheels and tires  
automatic slack adjusters

WABCO ABS anti-skid brake system

Webb steel hub and drum assemblies - 10 stud

Air ride suspension

Air weigh system

Wide load sign brackets

Truck-lite sealed wiring harness lighting system, 3-M conspicuity tape

Non-slip protective surface coating

Painted United Rental Blue with top of trailer and flanges painted non-skid yellow

Mud flaps, measuring stick holder

### QUOTE #

L25405: 50' length - 3 axle



## FLATBED TRAILER



### SPECIFICATIONS

80,000 lb GVWR

102" Width

All steel construction

Apitong wood deck

4" steel jr I-beam crossmembers on 12" centers

6" channel side rails

Stake pockets and pipe spools located on 24" Centers

Roadside winch track with 12 sliding winches

Two - tool boxes - one each side

Dunnage rack each side

Heavy duty two speed landing gear with 10" x 10" cushion foot shoes

Two - 25,000 lb air brakes axles

Air ride suspension

Air-weigh scale system

Axles can be individually repositioned to alternate spacings from 48" to 120" in 6" increments or set at 122" widespread

Air release pins for slider operation

295/75R 22.5 tires on 8.25 x 22.5 steel wheels

Cats eye tire monitoring system

Sealed wiring harness with LED lighting

Empty weight - 11,200 lb +/- 3%

Painted United Rental Blue with flanges painted non-skid yellow

Mud flaps

### QUOTE #

L25412: 48' length - 2 axle



## DROP DECK TRAILER



### SPECIFICATIONS

80,000 lb GVWR distributed - 50,000 lbs concentrated in 10'

10' top deck, 38' bottom deck

102" width

Rear Deck Height: 40" loaded

6" channel side rail with stake pockets/  
rub rail on 24' centers with pipe spools

24" Main Beams

4" crossmembers on 14" centers

Kingpin with 18 inch setting

Loaded Fifth Wheel Height 49 inches

Jost landing gear

Knee braces each side

Spring brakes, auto slacks

ABS: 4S/2M

10-hole hub-piloted with outboard cast  
drums

22.5 x 8.25 steel disc wheels

255/70R 22.5 16PR OEM standard

Cats eyes tire monitoring system

Two Hendrickson HT 25,000 lb axles Air  
ride with Rear axle slide 61" - 122"

Electric Dump Valve

Air-weigh scale system

LED Lighting, Trailer safety lights, Conspi-  
cuity tape

DOT bumper with dock bumpers

Winch track roadside with 12 sliding  
winches

Winch Straps not included

Tool Box - one each side 16"x18"x60"

Dunnage rack each side

Non-slip protective surface coating

Painted United Rental Blue with top of  
trailer and flanges painted non-skid  
yellow

Mud flaps, measuring stick holder

### QUOTE #

L25410-SA: 48' length - 2 axle

L25414-CN: 53' length - 3 axle |  
110,000 lb GVWR distributed - 70,000 lbs  
concentrated in 10'





## SELF CONTAINED UNIT



### SPECIFICATIONS

25" X 30" X 42.5" Tall

18HP Gas Engine with Electric Start

15 GPM Hydraulic Pump

Return Filter 1 $\frac{1}{4}$ "

10'  $\frac{1}{2}$ " Pressure Hose  $\frac{3}{4}$ " Female FD56  
QD

10'  $\frac{3}{4}$ " Return Hose 1" Female FD56 QD

Fuel Tank 8 Gallons

Hydraulic Oil Tank 33 Gallons

### QUOTE #

L25100: Self Contained Hydraulic Wet Kit





# HYDRATILT TRUCK



## SPECIFICATIONS

All steel construction  
3" Steel cross members  
Apitong deck  
Star traction material full width - tail, fold & over wheel area  
Hydraulic tilting deck with dual cylinders  
10' load bearing tail plus 5' hydraulic fold under  
2.5" Receiver Tube  
36"Lx14"Tx12"D Toolbox  
D-ring mounted each side by toolbox  
20,000 lb Hydraulic winch with a 50'x5/8"

cable & tail chain  
Wireless remote hydraulic controls  
Manual front mount hydraulic controls  
Grab handles mounted each side on headache rack  
Truck-lite LED sealed wiring harness lighting system  
Swing-out loading lights on rear  
Rear Work Lights  
Chain Pan Work Lights  
Runway lights under tail  
Curb lights located in wheel well for driver safety

Chain slot tie downs on 24" centers  
Center chain slots  
Electric trailer brake system  
LED Strobe Light bar mounted  
3/4" LED Marker Lights  
Two container guide rollers  
Back-up camera system  
Back-up alarm, Mud flaps  
DOT LED lights & reflectors  
Reflexite conspicuity tape  
Sealed Wiring Harness  
Painted One Color



# ATTENUATOR TRUCK



## SPECIFICATIONS

20' Stakebed

96" Overall body width for outside to outside rub rail

Tread Plate steel floor

8" X 11.5# structural long members

3" jr I-beam crossmembers on 12" centers

Solid 10 ga. steel bulkhead to bottom of rear window with expanded metal above to top up cab

Side and rear external stake pockets

DOT approved lights; Front Corner Lights; Recessed Lighting

Back-up alarm, Mud flaps

Fire extinguisher & triangle reflector kit

Painted Black

Stake Sides each side and rear - Powder Coated Yellow

Cone Seat each side with safety gate and yellow anti-skid painted on steps

Scorpion TL-3 TMA - MASH Certified

Complete TMA with Two 90 Degree Folds

12 Volt Electrical System, Hydraulic Motor & Cylinders

One - Center Mounted Support Post

Standard Reflective Red White Sheeting Pattern

For use of speeds of 62 MPH or more

Light package to include 8 flood lights, 3 each side on separate switch and 2 on bulkhead

Two - strobe lights mounted on rear

Trafcon 25 Light LED Arrow board:

48"x 96" 25 Light Panel, Wide Angle LED

Power mount with wireless remote

Geotab Telematics

Backup Camera

## QUOTE #

L25705: Freightliner M2 | Auto | Air

L25706: International MV | Auto | Air

L25707: Ford F750 Gas | Auto | Hyd



## FLATBED DUMP



### SPECIFICATIONS

16' x 8' x 12" wooden side boards  
10 ga. smooth steel over wood floor  
8" x 11.5# structural channel longitudinal members  
4" I-beams, cross members on 12" centers  
Cab shield  
10 ga. steel bulkhead with slotted window  
Underbody hoist - 14 ton capacity  
Safety support struts  
Side and rear stake pockets  
PTO and pump assembly with hydraulic tank  
In-cab shift tower  
Large in-cab "Body Raised" light indicator

Recessed corner marker lights  
DOT approved lights  
Rear bumper, mud flaps, Fire extinguisher, triangle reflector kit  
Painted black  
Geotab Telematics

### QUOTE #

L25500-H: Freightliner M2 | Auto | Hyd  
L25500-IH: International MV | Auto | Hyd  
L25500-IH AIR: International MV | Auto | Air



## 3-4 DUMP

### SPECIFICATIONS

- 3 to 4 cubic yard capacity,
- 12 ga. steel sides, front & tailgate continuous welded
- 10 ga. floor, Heavy duty front & rear corner pillars
- One-piece cab shield with window
- Boxed top rail
- Heavy duty tailgate - two-way operation
- Recessed lights
- 9.7 ton scissor hoist
- Electric over hydraulic operation
- Pintle ball hitch
- Electric brake hook-up RV type light plug
- Spring loaded crank type tarp cover
- Back up alarm, DOT approved lights
- Rear bumper, mud flaps, Fire extinguisher, triangle reflector kit
- Painted Black
- Luverne grip running boards with reflective tape
- Geotab Telematics



### QUOTE #

- L25501-CGx4: Ford F550 Gas | 4x4 | Crew
- L25501-CG: Ford F550 Gas | 4x2 | Crew
- L25501-Gx4: Ford F550 Gas | 4x4
- L25501-G: Ford F550 Gas | 4x2
- L25501-Cx4: Ford F550 Diesel | 4x4 | Crew
- L25501-C: Ford F550 Diesel | 4x2 | Crew
- L25501x4: Ford F550 Diesel | 4x4
- L25501: Ford F550 Diesel | 4x2



## 5-6 TUB DUMP

### SPECIFICATIONS

- 5 to 6 cubic yard capacity
- 18 ton capacity hoist, 50 degree dump
- 1/4" front, sides, and rear gate chutes in tailgate
- 1/4" floor, continuous welded 20" radius corners
- 6" x 3" x 3/8" structural tubing long-members
- 1/4" cylinder housing
- 3/16" steel sloped top rail with 6" wooden side boards
- 10 ga. steel cab shield
- Full length 10 ga. steel fenders
- Rear taillight guard, front corner lights
- In cab shift tower
- In cab "body raised" light indicator
- Manual mechanical tailgate latch, with 6" asphalt lip
- Single wide chute in tailgate
- Air shift PTO with pump
- Reflector and flare kit, 5lb. fire extinguisher
- Safety support struts



- Spring loaded crank type tarp cover
- Pintle hitch - Holland model PH400, 45 ton capacity mounted in accordance with SAE J849B
- 7 pole socket assembly, electric brake hook up
- DOT approved lights
- Rear bumper, mud flaps, Fire extinguisher, triangle reflector kit
- Painted black
- Geotab Telematics

### OPTIONS

- Electric Tarp

### QUOTE #

- L25502-H: Freightliner M2 | Auto | Hyd
- L25514: International MV | Auto | Hyd



## 5-6 BOX DUMP



### SPECIFICATIONS

- 5 to 6 cubic yard capacity
- 7 ga. steel sides, front, and tailgate continuous welded
- 1/4" steel floor
- 6" x 8.2# structural channel longitudinal members
- 2" x 4" rectangular top rails
- 3" I-beam crossmembers on 12" centers
- Cab shield
- In cab shift tower
- In cab "body raised" light indicator
- Double acting tail gate with horizontal and vertical braces with spreader chains
- 18 ton capacity hoist, 50 degree dump
- Safety support strut
- Sideboard pockets with wood side boards

bolted in sloping rub rails & sloping inside chamber strips

Pintle hitch - Holland model PH400, 45 ton capacity mounted in accordance with SAE J849B

Single chute in tailgate, 6" asphalt lip

Spring loaded crank type tarp cover

7 pole socket assembly, electric brake hookup

DOT approved lights

Rear bumper, mud flaps, Fire extinguisher, triangle reflector kit

Painted black

Geotab Telematics

### OPTIONS

Electric Tarp

### QUOTE #

- L25503: Ford F750 Gas | Auto | Hyd
- L25504-A: Freightliner M2 | Auto | Air
- L25504-H: Freightliner M2 | Auto | Hyd
- L25504-SP: Freightliner M2 | Auto | Hyd | Plow Spreader
- L25513-A: International MV | Auto | Air
- L25513-H: International MV | Auto | Hyd
- L25513-SP: International MV | Auto | Hyd | Plow Spreader



## 10-14 TUB DUMP



### SPECIFICATIONS

10 to 14 cubic yard capacity  
Head lift hydraulic cylinder - 35 ton  
1/4" AR400 front, sides, and rear gate  
1/4" AR400 floor, continuous welded 26" radius corners  
8" Channel long-members  
1/4" AR400 cylinder housing  
3/16" steel sloped top rail with 6" wooden side boards  
10 ga. steel cab shield  
Full length 10 ga. steel fenders  
Real taillight guard, front corner lights  
In cab shift tower  
In cab "body raised" light indicator  
Air operated mechanical tailgate, with 8" asphalt lip

Air shift PTO with pump, Air operated controls  
Safety support struts  
Spring loaded crank tarp cover  
Pintle hitch with air outlet on rear  
Rear taillight guards  
DOT approved lights  
Rear bumper, mud flaps, Fire extinguisher, triangle reflector kit  
Painted black  
Geotab Telematics

### OPTIONS

Electric tarp

### QUOTE #

L25508: Freightliner M2 | Auto | Air





## 10-14 BOX DUMP



### SPECIFICATIONS

10 to 14 cubic yard capacity  
7 ga. steel sides, front, and tailgate continuous welded  
1/4" steel floor  
8" x 11.5# structural channel longitudinal members  
3 1/2" x 3 1/2" square top rails  
4" I-beam cross members on 12" centers  
Cab shield  
Double acting tail gate with horizontal & vertical braces  
Spreader chains with reinforced keyhole slots

Single chute in tailgate, 6" asphalt lip  
Air operated tailgate release/closure  
Front mount telescopic hoist - 35 ton capacity  
Safety support struts  
Top bumper board pockets with wood bumper boards bolted in  
Sloping rub rails & sloping inside chamber strips  
Spring loaded crank type tarp cover  
PTO and pump assembly with hydraulic oil tank  
In cab shift tower  
In cab "body raised" light indicator

Pintle hitch with air outlet on rear  
DOT approved lights  
Rear bumper, mud flaps, Fire extinguisher, triangle reflector kit  
Painted black  
Geotab Telematics

### OPTIONS

Electric tarp

### QUOTE #

L25507: Freightliner M2 | Auto | Air



## 2000 GALLON WATER



### SPECIFICATIONS

2000 gallon water tank assembly complete with manway  
One crosswise baffle  
One longitudinal baffle  
Rear ladder-push bumper-tool box  
All welded subframe  
Rubber mounting, Sight tube  
Hydrant fill capability  
Top discharge hydrant fill water drop  
Hose reel with 50' - 1 1/4" jet spray hose with nozzle  
4"x3" pump - PTO driven  
Two - front spray heads

Two - rear spray heads  
Side spray nozzle with 1 1/2" hose outlet  
Low point drain cocks  
In-cab air control valves  
Steel fenders  
Suction plumbed reservoir  
Reservoir interior blasted and coated with Lifelast  
DOT approved lights  
Rear bumper, mud flaps, Fire extinguisher, triangle reflector kit  
Painted one color  
Geotab Telematics

### OPTIONS

Water cannon

### QUOTE #

L25600: International MV | Auto | Air  
L25601: International MV | Auto | Air | 26,000 GVW  
L25602: Freightliner M2 | Auto | Air | 26,000 GVW  
L25603: Freightliner M2 | Auto | Air



## 4000 GALLON WATER



### SPECIFICATIONS

4000 gallon water tank assembly complete with manway  
Three crosswise baffles  
One longitudinal baffle  
Rear ladder-push bumper-tool box  
All welded subframe  
Rubber mounting, Sight tube  
Hydrant fill capability  
Top discharge hydrant fill water drop  
Hose reel with 50' - 1 1/4" jet spray hose with nozzle  
4"x3" pump - PTO driven  
Two - front spray heads

Two - rear spray heads  
Side spray nozzle with 1 1/2" hose outlet  
Low point drain cocks  
In-cab air control valves  
Steel fenders  
Suction plumbed reservoir  
Reservoir interior blasted and coated with Lifelast  
DOT approved lights  
Rear bumper, mud flaps, Fire extinguisher, triangle reflector kit  
Painted one color  
Geotab Telematics

### OPTIONS

Water cannon

### QUOTE #

L25604: Freightliner M2 | Auto | Air

\* Image reflects optional water cannon



## 20'/22' STAKEBED WITH LIFT GATE



### SPECIFICATIONS

98" body width  
10 ga. smooth steel over wood floor  
8" X 11.5# structural long members  
3" jr I-beam crossmembers on 12" centers  
10 ga. steel bulkhead with window  
Internal stake pockets  
40" removable stake sides  
Spring loaded latches for side panels

13"x18"x36" toolbox each side  
2,500 lb rear lift gate  
DOT approved lights  
Rear bumper, mud flaps, Fire extinguisher,  
triangle reflector kit  
Painted black  
GeotabTelematics

### QUOTE #

L25700: Freightliner M2 | Auto | Hyd  
L25700-750G: Ford F750 Gas | Auto | Hyd  
L25700-750D: Ford F750 Diesel | Auto | Hyd  
L25701-I: International MV | Auto | Hyd



## 12' STAKEBED WITH LIFT GATE



### SPECIFICATIONS

12' x 96" Stake Bed  
All steel construction, steel floor  
Formed side channel  
3" steel crossmembers on 16" centers  
4" structural channel longitudinal  
Full cab protector  
42" removable stake sides  
Spring loaded latches for side panels - four per side  
Three - tie downs per side  
Recessed lights  
2" ball/pintle combination receiver hitch  
Electric brake control, RV style light plug  
13"x18"x36" toolbox

2,000 lb electric/hydraulic rear lift gate  
Backup Camera (C1000M-R)  
Luverne grip running boards with reflective tape  
DOT approved lights  
Rear bumper, mud flaps, Fire extinguisher, triangle reflector kit  
Painted black  
Geotab Telematics  
  
\*Shown with optional 1,300 lb electric/hydraulic side lift gate

### QUOTE #

L25701: Ford F550 Diesel | 4x4  
L25701-G: Ford F550 Gas | 4x4  
L25702: Ford F550 Diesel |4x4 | Crew  
L25703: Ford F550 Diesel | 4x2  
L25703-G: Ford F550 Gas | 4x2  
L25703-NG: Ford F550 Gas | 4x2 |  
No Lift Gate  
L25703-SG: Ford F550 Diesel | 4x2 |  
Side & Rear Gate  
L25704-G: Ford F550 Gas | 4x2 | Crew



## PORTABLE RESTROOM SERVICE



### SPECIFICATIONS

1500 Gallon

Two compartment tank - 1100G Waste/  
400G Fresh

160 CFM Vacuum pump, Masport

230 CFM Masport model #HXL75V right  
angle drive vacuum pump

Burk's DC-10 Water Pump

Masport primary and secondary moisture  
trap

2" Bucket fill, driver's side

Dual cabinets with aluminum locking  
doors

3" Side discharge valve

Hannay Hose Reel with 50' of 1/2" fresh-  
water hose with nozzle

3" Top inlet reduced to 2" after ball valve

2" x 50' Suction hose with wand, ball  
valve, and holster

Dual suction service

Rear work lights with switch in cab

Dual toilet carrier on back

Vac Spacers Apitong wood spacers be-  
tween chassis and subframe

Vac Head Material 1/4" Mild Steel heads

Vac Shell Material 1/4" Mild Steel Shell

Vac Trays Full Length Hose Fenders -  
10GA Steel with 1/4" Brackets

Vac Manway 20" Top Manway - one in  
each compartment

Light Plug Type 7 Pole socket assembly

Hitch Type Receiver hitch

LED stop, turn and backup lighting

Rear work lights with switch in cabinet

DOT approved lights

Rear bumper, mud flaps, Fire extinguisher,  
triangle reflector kit

Painted black

Geotab Telematics

### QUOTE #

L25800: Freightliner M2 | Auto | Air

L25800-I: International MV | Auto | Air



CUSTOM MANUFACTURING SINCE 1946



## LEDWELL & SON ENTERPRISES, INC.

3300 Waco St. | Texarkana, Texas 75501

888-LEDWELL | 903-838-6531

ledwell.com | Se habla Español



Not just well made **LEDWELL MADE.**